Hyundai Elantra GT (without NAV) 2013-up
99-7357HG




KIT FEATURES

- ISO DIN radio provision with pocket
- ***Painted high gloss black***

KIT COMPONENTS

• A) Radio housing trim panel • B) Brackets • C) Pocket • D) (4) #8 x 3/8" Phillips screws

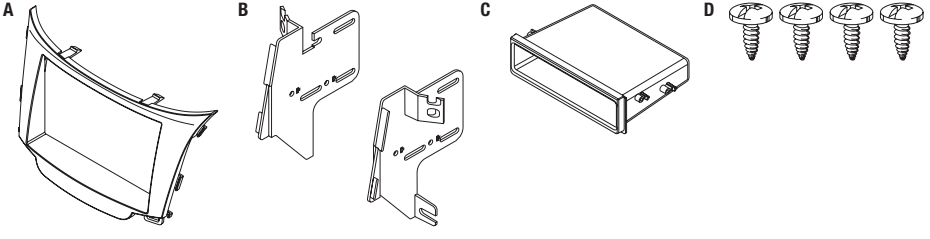

WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7304

Antenna Adapter: • Not required

Table of Contents

Dash Disassembly 2

Kit Assembly

– ISO DIN radio provision with pocket..... 3

TOOLS REQUIRED

• Panel removal tool • Phillips screwdriver

CAUTION! *All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.*


REV. 9/13/2016 INST99-7357HG

© COPYRIGHT 2016 METRA ELECTRONICS CORPORATION


Dash Disassembly

1. Unsnap and remove the vent panels from either side of the radio down to the shifter base. (Figure A)
2. Remove the (4) screws and remove the radio. (Figure B)

Continue to kit assembly

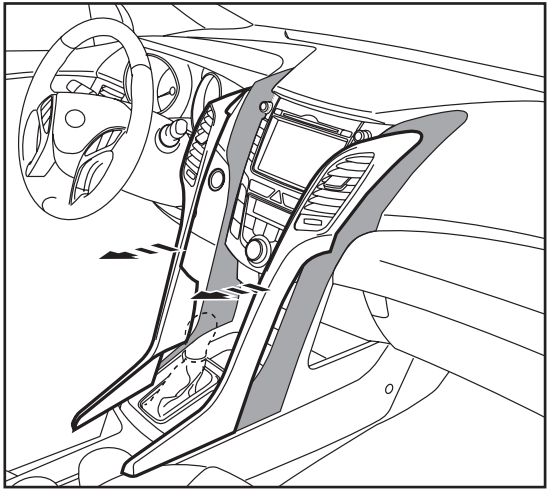

(Figure A)

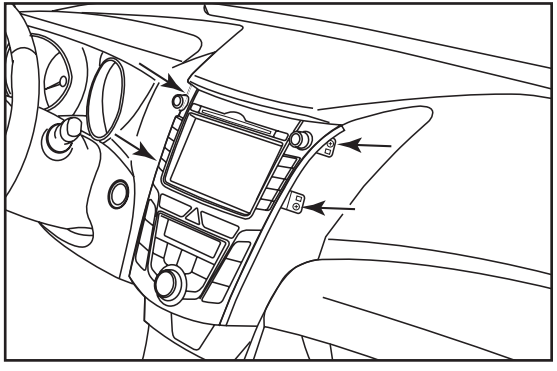


(Figure B)


Kit Assembly

ISO DIN radio provision with pocket


1. Attach the *radio brackets* to the *radio housing trim panel*. (Figure A)
2. Mount the *pocket* to the bracket/ panel assembly with the *(4) #8 x 3/8" Phillips screws* supplied. (Figure B)
3. Slide the radio into the assembly and secure with screws supplied with the radio. (Figure C)
4. Locate the factory wiring harness and antenna connector in the dash, and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or AXXESS. Test the radio for proper operation.
5. Mount the new radio assembly into the dash and reassemble the dash in reverse order of disassembly.

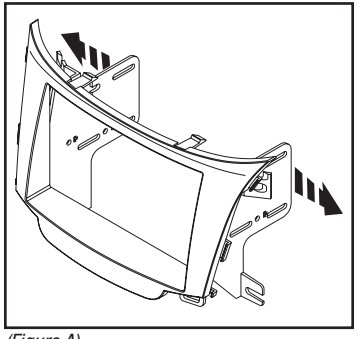

(Figure A)

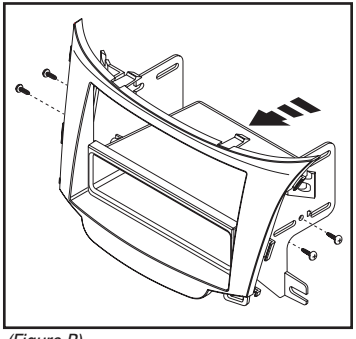

(Figure B)

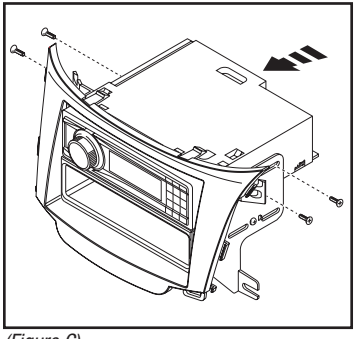

(Figure C)

IMPORTANT

If you are having difficulties with the installation of this product, please call our Tech Support line at **1-800-253-TECH**. Before doing so, look over the instructions a second time, and make sure the installation was performed exactly as the instructions are stated. Please have the vehicle apart and ready to perform troubleshooting steps before calling.

KNOWLEDGE IS POWER
Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry.
Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.

Metra recommends MECP certified technicians

REV. 9/13/2016 INST99-7357HG

© COPYRIGHT 2016 METRA ELECTRONICS CORPORATION

Hyundai Elantra GT (sin NAV) 2013 y mas
99-7357HG




CARACTERÍSTICAS DEL KIT

- Provisión de radio ISO DIN con cavidad
- ***Pintura negra de alto brillo***

KIT COMPONENTS

• A) Panel de la moldura para carcasa del radio • B) Soportes • C) Cavidad • D) (4) tornillos Phillips #8 de 3/8”

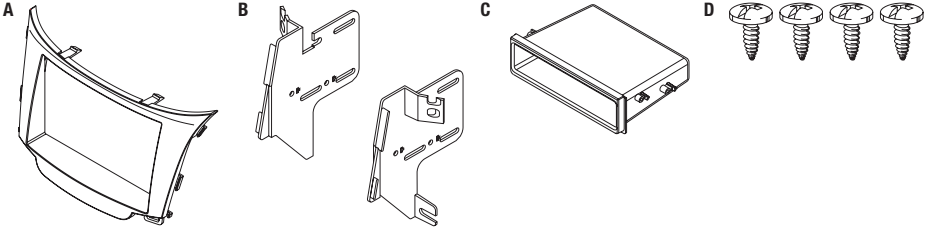

CABLEADO Y CONEXIONES DE ANTENA (se venden por separado)

Arnés de cables: • 70-7304

Adaptador de antena: • No se requiere

indice

Desmontaje del tablero 2

Ensamble del kit

– Provisión de radio ISO DIN con cavidad..... 3

HERRAMIENTAS REQUERIDAS

- Herramienta para quitar paneles
- Destornillador Phillips

¡PRECAUCIÓN! *Todos los accesorios, interruptores, paneles de controles de clima y especialmente las luces del indicador de las bolsas de aire deben estar conectados antes ciclar la ignición. Además, no quite el radio de fábrica con la llave en la posición o de encendido ni con el vehículo funcionando.*


REV. 9/13/2016 INST99-7357HG

© COPYRIGHT 2016 METRA ELECTRONICS CORPORATION


Desmontaje del tablero

1. Suelte a presión y quite los paneles de las rejillas de cada lado del radio hacia la base de la palanca de velocidades. (Figura A)
2. Quite los (4) tornillos y quite el radio. (Figura B)

Continúe con el ensamble del kit

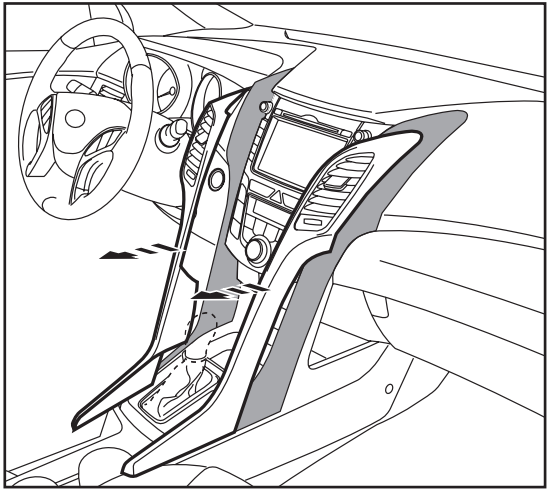

(Figura A)

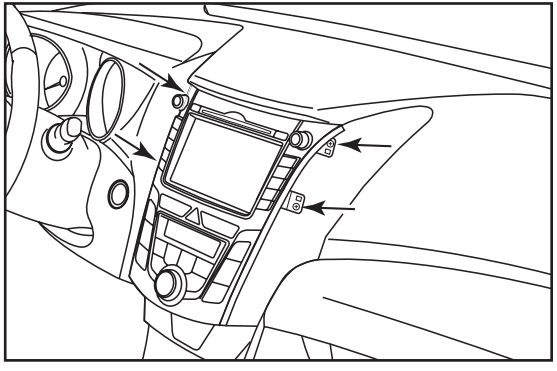


(Figura B)


Ensamble del kit

Provisión de radio ISO DIN con cavidad


1. Una los *soportes del radio* al *panel de la moldura de la carcasa del radio*. (Figura A)
2. Monte la cavidad en el ensamble del soporte/panel con los *(4) tornillos Phillips #8 x 3/8"* suministrados. (Figura B)
3. Deslice el radio en el ensamble y sujételo con los tornillos suministrados con el radio. (Figura C)
4. Localice el arnés de cableado de fábrica en el tablero. Metra recomienda que use adaptadores adecuados de acoplamiento de Metra y/o de AXXESS. Pruebe el radio para verificar que funcione correctamente.
5. Monte el conjunto del radio en el tablero y vuelva a armar el tablero al revés de como lo desarmó.

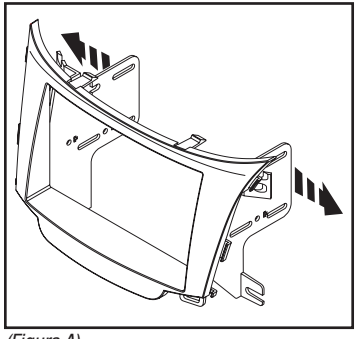

(Figura A)

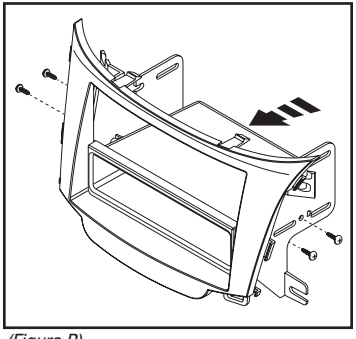

(Figura B)

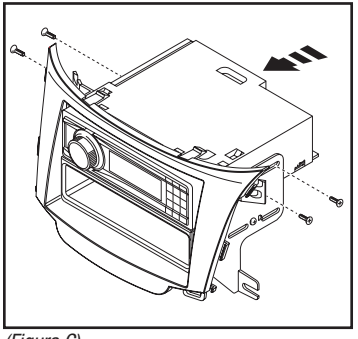

(Figura C)

IMPORTANTE

Si tiene dificultades con la instalación de este producto, llame a nuestra línea de soporte técnico al **1-800-253-TECH**. Antes de hacerlo, revise las instrucciones por segunda vez y asegúrese de que la instalación se haya realizado exactamente como se indica en las instrucciones. Por favor tenga el vehículo desarmado y listo para ejecutar los pasos de resolución de problemas antes de llamar.

EL CONOCIMIENTO ES PODER

Mejore sus habilidades de instalación y fabricación inscribiéndose en la escuela de dispositivos electrónicos móviles más reconocida y respetada de nuestra industria. Regístrese en www.installerinstitute.com o llame al 800-354-6782 para obtener más información y avance hacia un futuro mejor.

Metra recomienda técnicos con certificación del Programa de Certificación en Electrónica Móvil (Mobile Electronics Certification Program, MECP).

REV. 9/13/2016 INST99-7357HG

© COPYRIGHT 2016 METRA ELECTRONICS CORPORATION