

KIT FEATURES

- ISO head unit provisions
- CD jewel case pocket (holds 2 jewel cases)

KIT COMPONENTS

Radio Housing





ISO Brackets

(2) #10 x ¾" Phillips Pan-head Screws



TOOLS REQUIRED



Phillips screwdriver

rev. 240701

99-7311
INSTALLATION INSTRUCTIONS

APPLICATIONS

CAR	PAGE
HYUNDAI	
Sonata 1999-01	1-2




1-800-221-0932 www.metraonline.com

© COPYRIGHT 2001 METRA ELECTRONICS CORPORATION


ALL VEHICLES

1

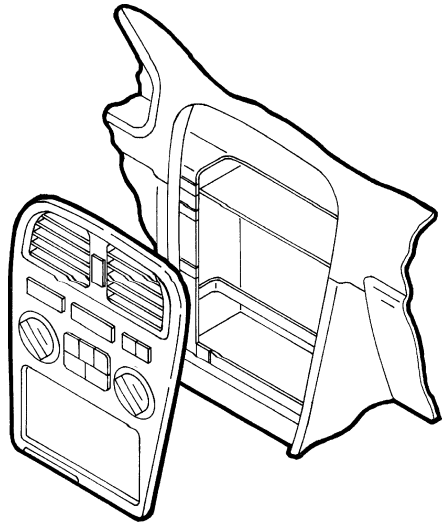


Disconnect the negative battery terminal to prevent an accidental short circuit. Detach the cable located under the left side of the glove box. Unclip the trim piece in front of the gear shifter and remove (2) Phillips screws exposed. Unclip the gear shifter trim and remove (2) Phillips screws exposed. Unclip the radio trim bezel and remove. Remove (6) Phillips screws securing the factory head unit and disconnect the wiring.

2

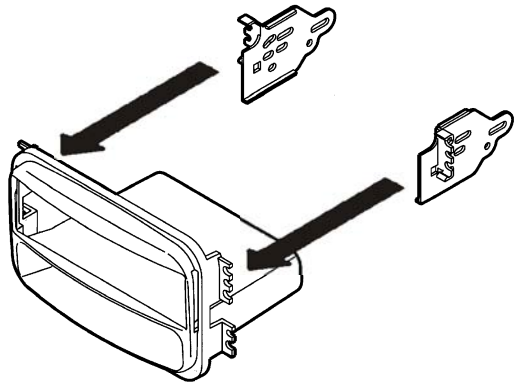


Snap the ***ISO Brackets*** over the mounting tabs on the ***Radio Housing.***

3

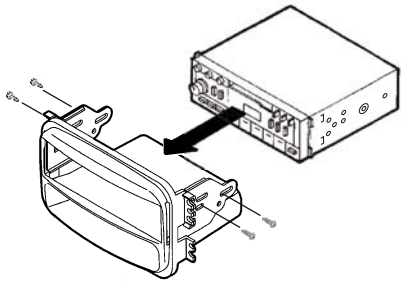

Slide the head unit into the ***Radio Housing,*** align the holes in the head unit with the holes in the Housing and mount the unit with the screws supplied with the unit.


4



A) Strip wire ends back ½"
B) Twist ends together
C) Solder
D) Tape

Locate the factory wiring harness in the dash. Metra recommends using the proper mating adaptor and making connections as shown. (Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit).

5

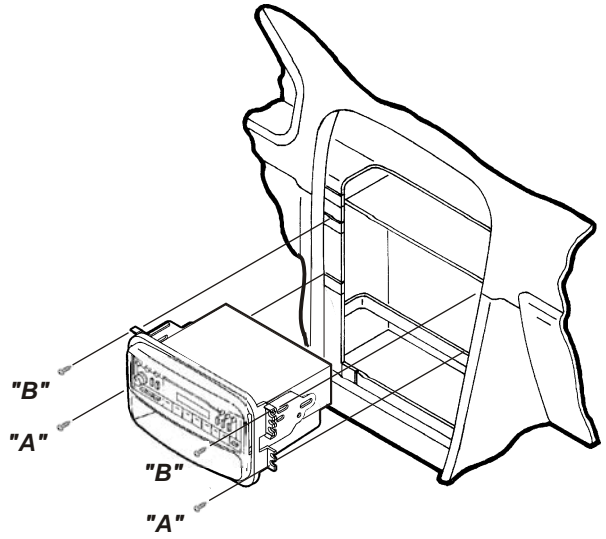

Re-connect the battery terminal and test the unit for proper operation. Mount the head unit/kit assembly to the sub-dash with (2) Phillips screws previously removed in step #1 *("A")* and ***(2) #10 x ¾" Phillips Pan-head Screws*** supplied *("B")*.