INSTALLATION INSTRUCTIONS FOR PART 95-7425

APPLICATIONS

Nissan Rogue 2008-2010

95-7425





KIT FEATURES

- Double DIN radio provision
- Stacked ISO mount units provision

KIT COMPONENTS

- A) Double DIN radio housing • B) Double DIN brackets





WIRING & ANTENNA CONNECTIONS (Sold Separately)

Wiring Harness:

- 70-7552 Nissan harness 07-up
- 40-NI12 Nissan antenna adapter 07-up

Antenna Adapter:

- Not Required

TOOLS REQUIRED

Panel Removal Tool • Phillips Screwdriver • Small Flat Blade Screwdriver



METRA. THE WORLD'S BEST KITS.™

1-800-221-0932 metraonline.com

© COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION

Table of Contents

Dash Disassembly

– Nissan Rougue 2008-2010 3-4

Kit Assembly

– Double DIN/stacked ISO mount units provision 5

Caution

Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

****NOTE: Refer also to the instructions included with the aftermarket radio.***

KNOWLEDGE IS POWER
Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.


Metra recommends MECP certified technicians

Dash Disassembly


1. ***If equipped with center speaker:*** Unclip and remove the grille (Figure A). Remove (4) Phillips screws securing the speaker. Unplug and remove the speaker. (Figure B).
2. Unclip the panel above the radio including the a/c vents, then unplug hazard switch and remove. (Figure C)

   Note: If not equipped with center speaker skip step number 2.


Continued on next page

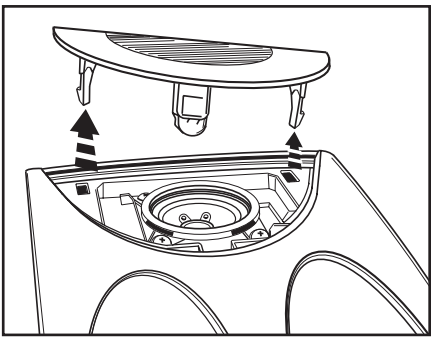

(Figure A)

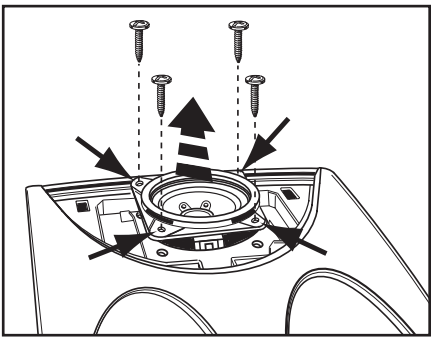

(Figure B)

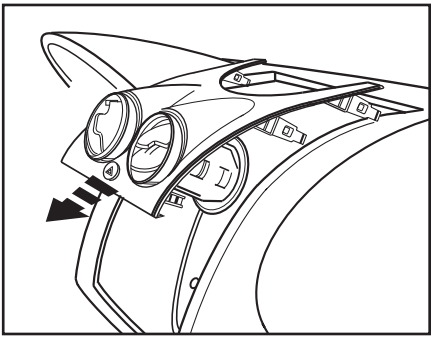


(Figure C)

Dash Disassembly


3. Unclip the panel below the radio including the climate controls. Unplug climate controls and remove the panel. (Figure D)

4. Remove (4) Phillips screws securing the radio, unplug and remove radio. (Figure E)

Continue to kit assembly

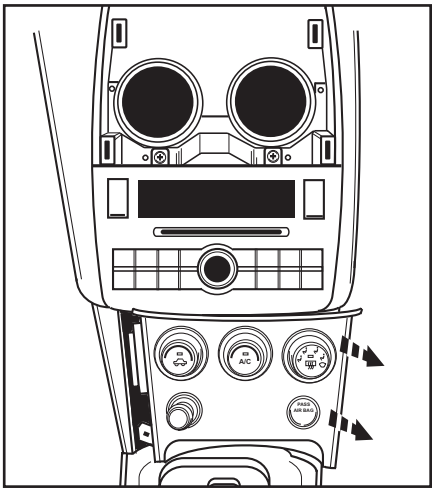


(Figure D)

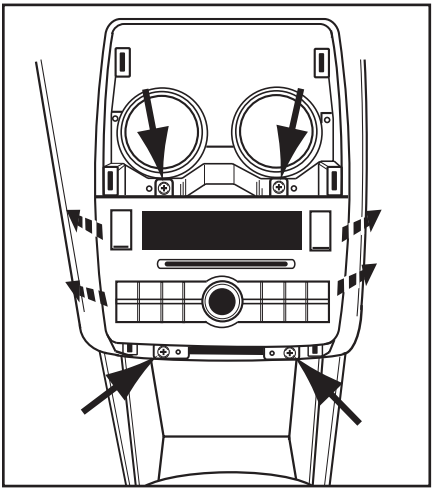


(Figure E)

Double DIN/stacked ISO mount units provision

1. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
2. Snap the Double DIN brackets to the inside edge of the Double DIN radio housing. (Figure A)
3. Slide the Double DIN or the stacked ISO mount unit(s) into the bracket/radio housing assembly and secure the unit(s) to the assembly using the screws supplied with the unit(s). (Figure B)
4. Reassemble dash in reverse order of disassembly.

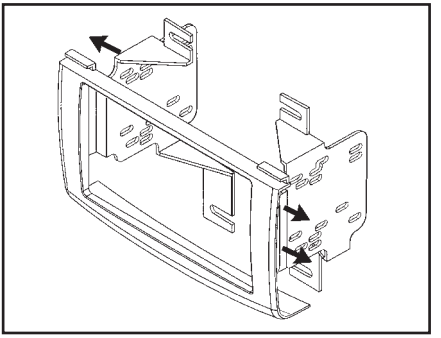

(Figure A)

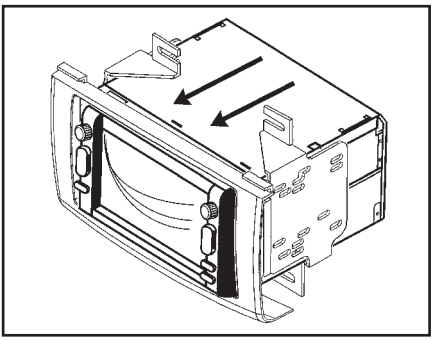

(Figure B)

Notes

REV. 5/13/11

© COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION