APPLICATIONS

Hyundai Genesis Coupe 2013-up
95-7352B




KIT FEATURES

- DDIN radio provision
- ***Painted Matte Black***


KIT COMPONENTS

• A) Radio Panel • B) Radio Brackets • C) (2) PC-7871 Panel Clips • D) (12) #8 x 1/2" Phillips screws


A




B



C



D



WIRING & ANTENNA CONNECTIONS (sold separately)

Wiring Harness: • 70-7304 Kia/Hyundai harness 2010-up • HYBL-04 Bluelink/Amp Interface

Antenna Adapter: • No antenna adapter required

Table of Contents

Dash Disassembly

– Hyundai Genesis 2013-up 2

Kit Assembly

– DDIN radio provision 3

TOOLS REQUIRED

• Phillips Screwdriver • Small Flat Blade Screwdriver
• Panel Removal tool

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.


NOTE: Refer to the instructions included with the aftermarket radio.

REV. 4/3/2013 INST95-7352B


 © COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION

Dash Disassembly


1. Unclip and remove the shifter trim panel. (Figure A)
2. Unclip and remove the display trim panel above radio. (Figure B)
3. Unclip and remove the radio/ climate control trim panel. (Figure C)
4. Remove (4) Phillips screws securing the radio. (Figure D)

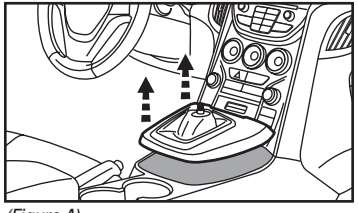


(Figure A)

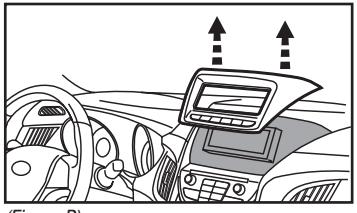

(Figure B)

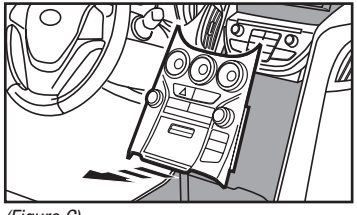


(Figure C)

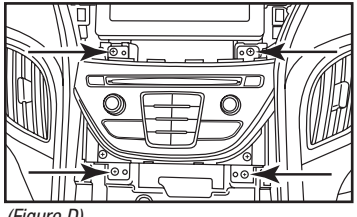


(Figure D)

5. Remove (4) Phillips screws securing the factory gauges to the radio/climate control panel. (Figure E)
6. Remove (4) Phillips screws securing the climate control to the radio/climate control panel. (Figure E)
7. Remove (4) Phillips screws securing the pocket assembly to the radio/climate control panel. (Figure F)

Continue to kit preparation

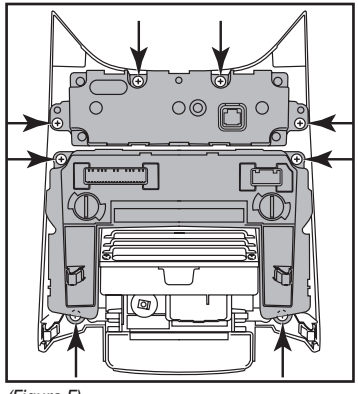

(Figure E)

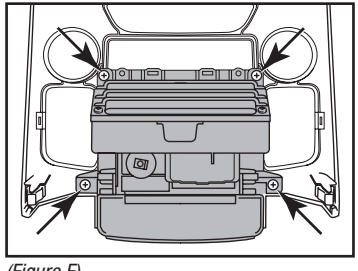


(Figure F)


Kit Preparation

1. Attach the pocket assembly to the 95-7352B radio panel using the (4) #8 x 1/2" Phillips screws provided. (Figure A)
2. Attach the climate control to the 95-7352B radio panel using (4) #8 x 1/2" Phillips screws provided. (Figure B)
3. Attach the factory gauges to the 95-7352B radio panel using (4) #8 x 1/2" Phillips screws provided. (Figure B)
4. Attach the provided (2) panel clips to the upper legs and the (2) factory clips to the lower legs of the 95-7352B radio panel.

Continue to kit assembly

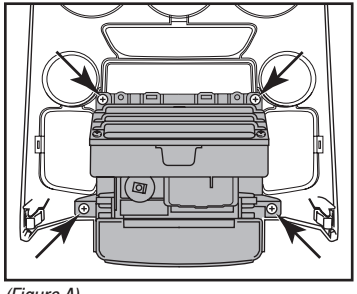


(Figure A)

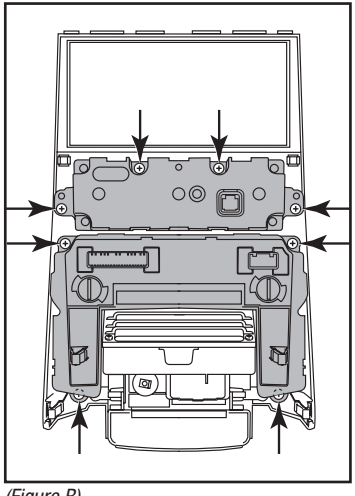

(Figure B)

Kit Assembly

1. Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
2. Attach the radio brackets to the aftermarket radio using the screws supplied with the radio, then mount the radio into the sub-dash (Figure A)
3. Reassemble dash in reverse order of disassembly using the 95-7352B trim panel instead of the factory trim panel.

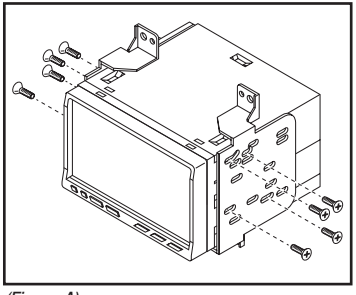

(Figure A)

REV. 4/3/2013 INST95-7352B



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians

 © COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION

INSTRUCCIONES DE INSTALACIÓN PARA LA PIEZA 95-7352B

APLICACIONES

Hyundai Genesis Coupe 2013 y mas
95-7352B




CARACTERÍSTICAS DEL KIT

- Provisión de unidad central DDIN
- ***Pintura negro mate***


COMPONENTES DEL KIT

- A) Panel del radio • B) Soportes para radio • C) (2) ganchos para panel PC-7871
- D) (12) tornillos Phillips #8x1/2”


A




B



C



D



CABLEADO Y CONEXIONES DE ANTENA (se venden por separado)

Arnés de cableado: • Arnés 70-7304 para Kia/Hyundai 2010 y más recientes

Adaptador de antena: • Adaptador de antena 40-KI11 para KIA/Hyundai 2010 y más recientes

Indice

Desmontaje del tablero

– Hyundai Genesis Coupe 2013 y mas 2

Ensamble del kit

– Provisión de unidad central DDIN..... 3

HERRAMIENTAS REQUERIDAS

- Herramienta para quitar paneles
- Destornillador Phillips
- Pequeño destornillador de paleta

PRECAUCIÓN: Metra recomienda desconectar el terminal negativo de la batería antes de comenzar cualquier instalación. Todos los accesorios, interruptores y, especialmente, las luces indicadoras de airbag deben estar enchufados antes de volver a conectar la batería o comenzar el ciclo de ignición.


Nota: Remítase a las instrucciones incluidas con el radio de posventa.

REV. 4/3/2013 INST95-7352B


© COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION

Desmontaje del tablero


1. Desenganche y quite el panel de moldura de la palanca de velocidades. (Figura A)
2. Desenganche y quite el panel de la moldura de la pantalla de arriba del radio. (Figura B)
3. Desenganche y quite el panel de la moldura del radio/control de clima. (Figura C)
4. Quite los (4) tornillos Phillips que sujetan el radio. (Figura D)

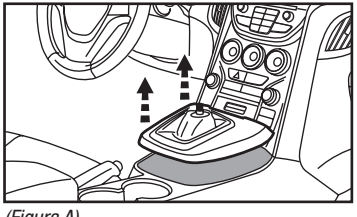


(Figura A)

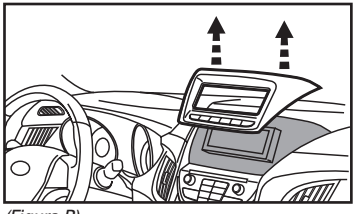

(Figura B)

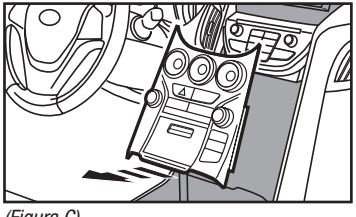


(Figura C)

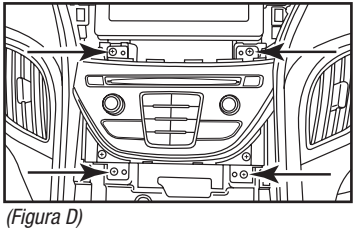


(Figura D)

5. Quite los (4) tornillos Phillips que sujetan los indicadores de fábrica al panel de control del radio/clima. (Figura E)
6. Quite los (4) tornillos Phillips que sujetan el control de clima al panel de control del radio/clima. (Figura E)
7. Quite los (4) tornillos Phillips que sujetan el ensamble de la cavidad al panel de control del radio/clima. (Figura F)

Continuar a la preparación de kit

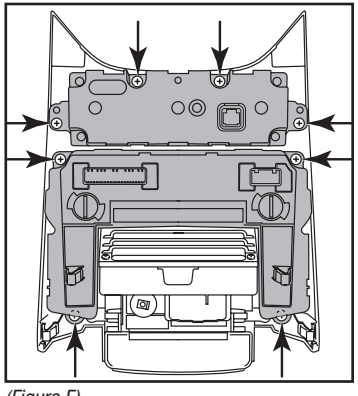

(Figura E)

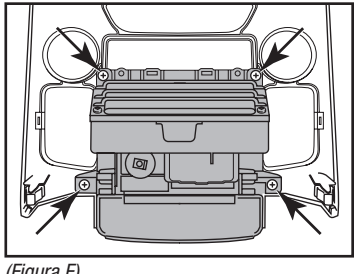


(Figura F)


Preparación del kit

1. Coloque el ensamble de la cavidad en el panel del radio 95-7352B utilizando los (4) tornillos Phillips #8x1/2" suministrados. (Figura A)
2. Coloque el control de clima en el panel del radio 95-7352B utilizando los (4) tornillos Phillips #8x1/2" suministrados. (Figura B)
3. Coloque los indicadores de fábrica en el panel del radio 95-7352B utilizando los (4) tornillos Phillips #8x1/2" suministrados. (Figura B)
4. Coloque los (2) ganchos del panel provistos en las patas inferiores del panel del radio 95-7352B.

continuar kit de ensamblaje

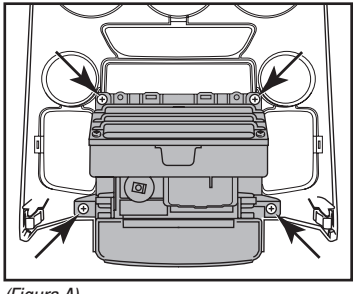

(Figura A)

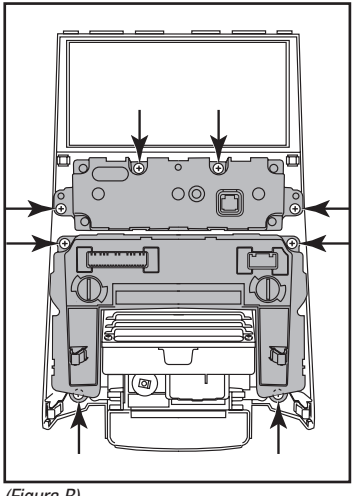


(Figura B)

Ensamble del kit

Provisiones de unidad central doble DIN:

1. Localice el arnés de cables de fábrica en el tablero. Metra recomienda el uso de un adaptador adecuado de acoplamiento de Metra o de AXXESS. Vuelva a conectar la terminal negativa de la batería y pruebe la unidad para verificar que funcione correctamente.
2. Coloque los soportes del radio al radio de mercado secundario y luego monte la unidad en el sub tablero. (Figura A)
3. Vuelva a armar el tablero en orden inverso al desensamble, usando el panel de moldura 95-7352B en lugar del panel de la moldura de fábrica.

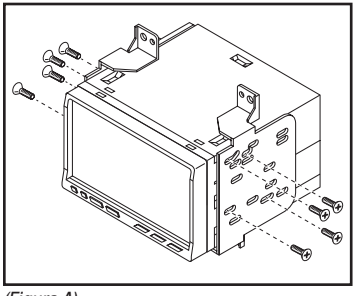

(Figura A)

REV. 4/3/2013 INST95-7352B

EL CONOCIMIENTO ES PODER

Mejore sus habilidades de instalación y fabricación inscribiéndose en la escuela de dispositivos electrónicos móviles más reconocida y respetada de nuestra industria. Regístrese en www.installerinstitute.com o llame al 800-354-6782 para obtener más información y avance hacia un futuro mejor.

Metra recomienda técnicos con certificación del Programa de Certificación en Electrónica Móvil (Mobile Electronics Certification Program, MECP).

 © COPYRIGHT 2004-2011 METRA ELECTRONICS CORPORATION