INSTALLATION INSTRUCTIONS FOR PART 95-7315

APPLICATIONS

Hyundai Tucson
2005-2009




95-7315


KIT FEATURES

- DDIN Head Unit Provision
- ISO Stacked Head Unit Provision

KIT COMPONENTS

A) Double DIN Trim Plate • B) Double DIN Brackets





WIRING AND ANTENNA CONNECTIONS (Sold Separately)
Harness: 70-7301 - KIA / HYUNDAI 1999-2008 Harness
Antenna Adapter: Not Required

TOOLS REQUIRED:

Small Flat Blade Screwdriver /Panel Removal Tool • Phillips Screwdriver



1-800-221-0932 www.metraonline.com

© COPYRIGHT 2004-2009 METRA ELECTRONICS CORPORATION

95-7315

TABLE OF CONTENTS

Dash Disassembly *1-2*

Kit Assembly *3*

KNOWLEDGE IS POWER

Enhance your installation and fabrication skills
by enrolling in the most recognized and respected
mobile electronics school in our industry.
Log onto www.installerinstitute.com
or call 800-354-6782 for more information
and take steps toward a better tomorrow.

95-7315

2005-2009 HYUNDAI TUCSON

DASH DISASSEMBLY


1 Disconnect the negative battery terminal to prevent an accidental short circuit.

2 Remove screw cover from back side of shift knob and remove (2) Phillips screws. Lift straight up on shift knob to remove. **(Figure A)**


3 Unclip and remove shift knob trim panel. **(Figure B)**

4 Remove (10) Phillips screws from dash support under shift knob trim panel and remove. **(Figure C)**


A

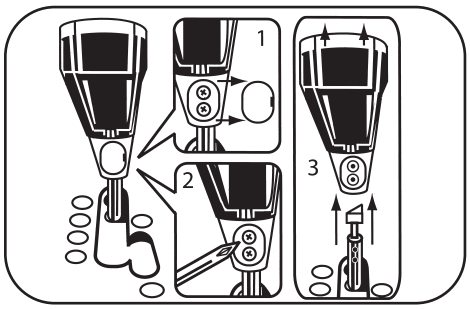

B

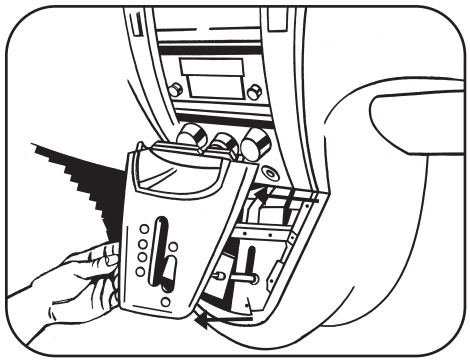

C

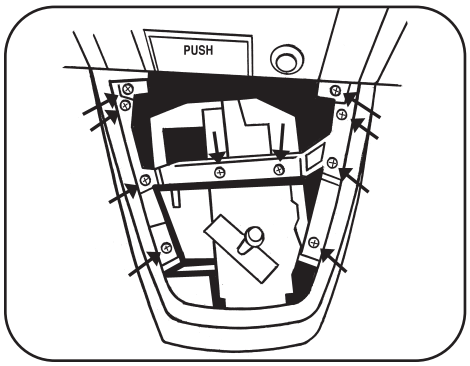


2005-2009 HYUNDAI TUCSON

DASH DISASSEMBLY


5 Remove (1) Phillips screw from bottom center of trim panel surrounding radio including a/c controls then unclip and remove panel. **(Figure D-E)**

6 Remove (4) Phillips screws to remove radio. **(Figure F)**


D

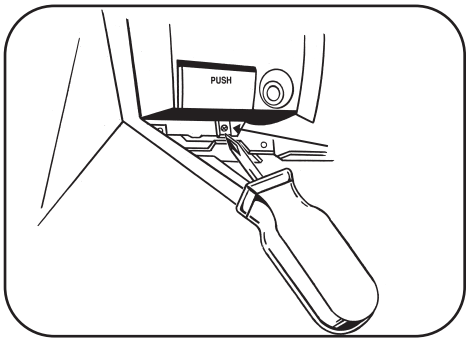

E

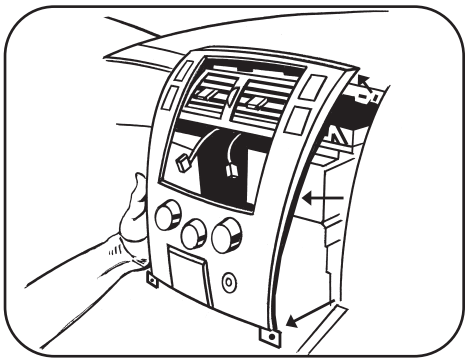

F

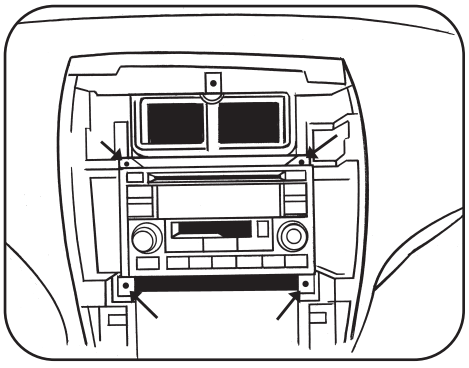


DOUBLE DIN HEAD UNIT PROVISION/ STACKED ISO DIN HEAD UNIT PROVISION

1 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS.Re-connect the negative battery terminal and test the unit for proper operation.


2 Snap the Double DIN brackets to the Double DIN trim plate. **(Figure A)**

A

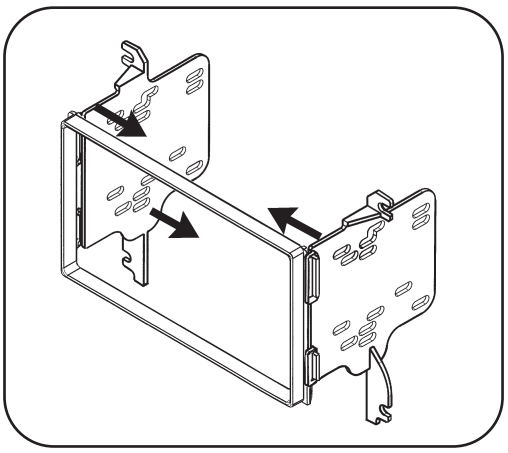

3 Slide the Double DIN head unit or stacked ISO head units into the bracket/trim plate assembly and secure the Double DIN head unit or stacked ISO head units to the assembly using the screws supplied with the radio. **(Figure B)**

B

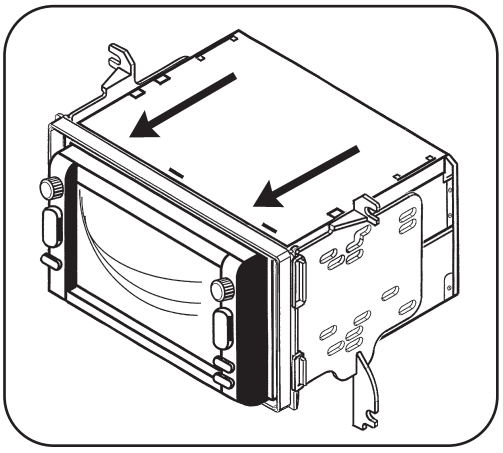

4 Reassemble dash in reverse order of disassembly.

NOTES

NOTES

INST95-7315

1-800-221-0932 www.metraonline.com

REV. 08-04-09 © COPYRIGHT 2004-2009 METRA ELECTRONICS CORPORATION INST95-7315